






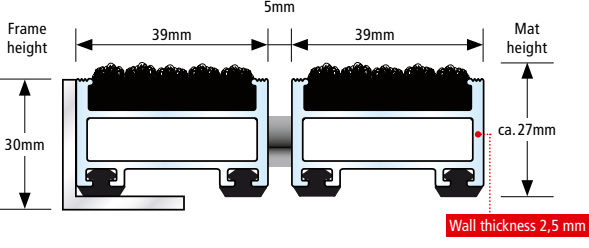

TOP CLEAN STABIL XL 27

Ribbed Carpet

This new Top Clean STABIL version is a very durable and efficient solution with long-term dimensional stability and 39 mm-wide profiles. It has been designed for large, spacious entrance areas. The system provides combinations in various heights for high pedestrian traffic. Options include ribbed carpet in a great variety of colours as well as cassette brushes and scraper bars. Suitable for lift trucks and transport trolleys. Sound-absorbing, dimensionally stable, rollable and easy to clean. Available in any width and length. Special shapes at extra charge.



-  For use indoors or in covered outdoor areas
-  Accessible
-  Accessible with hand lift truck
-  Recyclable
-  Rust-proof



- | | | | | | |
|----------|-------------------------------------|----------|---|----------|---|
| 1 | Zone 1: Coarse Dirt Collecting Area | 2 | Zone 2: Intermediate Zone for heavily frequented Entrance Areas | 3 | Zone 3: Fine Dirt and Damp Dirt Collecting Area |
|----------|-------------------------------------|----------|---|----------|---|

TECHNICAL DATA











Aluprofile	Warp resistant aluminium profile (alloy EN AW 6060)
Upper	Heavy Duty Ribbed Carpet: UV-resistant heavy-duty polypropylene
Underside	Base of the mat is mechanically fitted with rubber inserts for anti-slip and noise reduction
Connection	Stainless steel wire rope V2A Ø 3 mm
Lock	Special threaded nipple with stainless steel screw (rust-proof)
Profile spacing	5 mm. Flexible spacers made of rubber
Profile width Heavy Duty Ribbed Carpet	39 mm
Mat height	ca. 27 mm
Wall thickness	up to 2,5 mm
Weight /m²	17,4 kg
Max. profile length in one piece	300 cm
Max. weight in one piece	50 kg
Special shapes	Can be custom-made to your specifications (at an extra charge)
Mat division	Standard = as of a profile length of 300 cm or weight of 50 kg Mat divisions into a profile length and weight according to customer requirements are possible
Mat connectors	High-quality connecting elements made of V2A are mounted in the factory in the case of multiple-part mats



TOP CLEAN STABIL XL 27

Ribbed Carpet

PRODUCT INFORMATION

Traffic¹⁾  strong	Suitability for wheels²⁾  1.600 kg	Static load³⁾  7.000 kg	Load per wheel⁴⁾  450 kg
Dirt absorption  medium	Moisture absorption  high	Slip resistance  Ribbed Carpet R11	Fire behaviour  Ribbed Carpet Cfl-s1 (on request)
Warranty⁵⁾  10 years	Reach⁶⁾  REACH-compliant		
Suitability to cross over with	Wheelchair, Luggage trolley, Shopping trolley, Transport trolley, Lift trucks, Car		
Areas of application⁷⁾	<ul style="list-style-type: none"> • Object areas • Public areas • Private areas 		

ACCESSORIES

(for an additional charge)	<ul style="list-style-type: none"> • Mat frame • Dirt collecting trays • T-bars (for all multiple-part Top Clean mats without connectors)
----------------------------	--

SERVICES

(on site, for an additional charge)	<ul style="list-style-type: none"> • Building site advice • Measurement using digital measuring device • Fitting and laying service • Disposal of used mats • Repairs/replacement of insert types following wear • Cleaning
-------------------------------------	---